

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>C23F 11/16, C23C 22/02, 22/52, 22/53, 22/56, 22/68</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/67444</b> (43) International Publication Date: 29 December 1999 (29.12.99)
(21) International Application Number: PCT/EP99/04371 (22) International Filing Date: 24 June 1999 (24.06.99) (30) Priority Data: 09/104,260                      24 June 1998 (24.06.98)                      US (71) Applicant (for all designated States except US): UNIVERSITY OF CINCINNATI [US/US]; G-07 Wherry Hall, Cincinnati, OH 45267-0829 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): VAN OOL, Wim, J. [NL/US]; 154 Annadale Drive, Fairfield, OH 45014-0012 (US). SUBRAMANIAN, Vijay [IN/US]; 2935 Marshall Avenue #22, Cincinnati, OH 45220 (US). (74) Agent: GILL JENNINGS & EVERY; Broadgate House, 7 Eldon Street, London EC2M 7LH (GB).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: CORROSION PREVENTION OF METALS USING BIS-FUNCTIONAL POLYSULFUR SILANES		
(57) Abstract  <div style="display: flex; justify-content: space-between;"> <div data-bbox="203 1134 487 1449" style="width: 30%;"> <p>A method of preventing corrosion of metals using bis-functional polysulfur silanes. The method includes providing a metal surface, and applying a treatment solution onto the metal surface. The treatment solution includes at least one hydrolyzed bis-functional polysulfur silane of formula (I); wherein each R is an alkyl or an acetyl group, and Z is either -S<sub>x</sub> or -Q-S<sub>x</sub>-Q-, wherein each Q is an aliphatic or aromatic group, and x is an integer of from 2 to 9. A treatment solution and metal surface having improved corrosion resistance are also provided.</p> </div> <div data-bbox="682 1134 1218 1323" style="width: 40%; text-align: center;"> <math display="block">  \begin{array}{ccccc}  &amp; \text{OR} &amp; &amp; \text{OR} &amp; \\  &amp;   &amp; &amp;   &amp; \\  \text{RO} - &amp; \text{Si} &amp; - \text{Z} &amp; - \text{Si} &amp; - \text{OR} \\  &amp;   &amp; &amp;   &amp; \\  &amp; \text{OR} &amp; &amp; \text{OR} &amp;  \end{array}  \quad (I)  </math> </div> <div data-bbox="1169 1197 1218 1249" style="width: 25%;"></div> </div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**CORROSION PREVENTION OF METALS  
USING BIS-FUNCTIONAL POLYSULFUR SILANES**

5

**BACKGROUND OF THE INVENTION**

**FIELD OF THE INVENTION**

10           The present invention relates to a method of preventing corrosion of metal surfaces. More particularly, the present invention provides a method of preventing corrosion of a metal surface which comprises applying a solution containing one or more bis-functional polysulfur silanes to the metal surface. The method is particularly useful for treating surfaces of zinc, copper, aluminum, and alloys of the foregoing metals (such as brass and bronze).

15

**DESCRIPTION OF RELATED ART**

20           Most metals are susceptible to varying degrees and types of corrosion. which will significantly affect the quality of such metals, as well as that of the products produced therefrom. Although many forms of corrosion can sometimes be prevented, such steps are costly and may further diminish the utility of the final product. In addition, when polymer coatings such as paints, adhesives, or rubbers are applied to the metal, corrosion of the base metal material may cause

25           a loss of adhesion between the polymer coating and the base metal.

30           Prior art techniques for improving corrosion resistance of metals, particularly metal sheet, include passivating the surface by means of a heavy chromate treatment. Such treatment methods are undesirable, however, because the chromate ion is highly toxic, carcinogenic and environmentally undesirable. It is also known to employ a phosphate conversion coating in conjunction with a chromate rinse in order to improve paint adherence and provide corrosion protection. It is believed that the chromate rinse covers the

pores in the phosphate coating, thereby improving the corrosion resistance and adhesion performance. Once again, however, it is highly desirable to eliminate the use of chromate altogether. Unfortunately, the phosphate conversion coating is generally not effective without the chromate rinse.

5

Recently, various techniques for eliminating the use of chromate have been proposed. These include coating the metal with an inorganic silicate followed by treating the silicate coating with an organofunctional silane (U.S. Patent No. 5,108,793). U.S. Patent 5,292,549 teaches the rinsing of metal sheet  
10 with a solution containing an organofunctional silane and a crosslinking agent in order to provide temporary corrosion protection. The crosslinking agent crosslinks the organofunctional silane to form a denser siloxane film. One significant drawback of the methods of this patent, however, is that the organofunctional silane will not bond well to the metal surface, and thus the  
15 coating of U.S. Patent No. 5,292,549 may be easily rinsed off. Various other techniques for preventing the corrosion of metal sheets have also been proposed. Many of these proposed techniques, however, are ineffective, or require time-consuming, energy-inefficient, multi-step processes.

20 Further complicating the task of preventing corrosion of metals is the fact that corrosion can occur by a number of different mechanisms, depending in large part upon the particular metal in question. Brass, for example, is very sensitive to corrosion in aqueous environments (particularly uniform corrosion), dezincification (especially in acid-chloride containing solutions), and stress  
25 corrosion cracking (particularly in the presence of ammonia and amines). Copper, and copper alloys (including brass) will tarnish readily in air and in sulfur-containing environments. Zinc, and zinc alloys, on the other hand, are particularly susceptible to the formation of "white rust" under humid conditions. Unfortunately, many of the prior art treatment methods for preventing corrosion  
30 are less effective on zinc, zinc alloys, copper, and copper alloys, especially brass and bronze, or are only effective for certain types of corrosion.

Thus, there is a need for a simple, low-cost technique for preventing corrosion of metal surfaces, particularly zinc, zinc alloys, aluminum, aluminum alloys, copper, and copper alloys (especially brass and bronze).

5

## SUMMARY OF THE INVENTION

It is an object of the present invention to provide an improved method of preventing corrosion of metal surfaces.

10

It is another object of the present invention to provide a treatment solution for preventing corrosion of metal surfaces.

15


It is yet another object of the present invention to provide a method of preventing corrosion of metal surfaces, particularly zinc, copper, aluminum, and alloys of the foregoing metals.

The foregoing objects can be accomplished, in accordance with one aspect of the present invention, by providing a method of treating a metal surface to improve corrosion resistance, comprising the steps of:

20

- (a) providing a metal surface; and
- (b) applying a treatment solution onto the metal surface, the treatment solution containing at least one bis-functional polysulfur silane which has been at least partially hydrolyzed, the silane comprising:

25




wherein (before hydrolysis) each R is an alkyl or an acetyl group, and Z is either  $-S_x$  or  $-Q-S_x-Q-$ , wherein each Q is an aliphatic or aromatic group, and x is an integer of from 2 to 9 (preferably 4).

5            Each R may be individually chosen from the group consisting of: ethyl, methyl, propyl, iso-propyl, butyl, iso-butyl, sec-butyl, ter-butyl and acetyl. It will be understood, however, that hydrolysis of the silane results in the R groups (at least a portion of them, and preferably substantially all of them) being replaced by a hydrogen atom. Each Q may be individually chosen from the group  
10            consisting of:  $C_1 - C_6$  alkyl (linear or branched),  $C_1 - C_6$  alkenyl (linear or branched),  $C_1 - C_6$  alkyl substituted with one or more amino groups,  $C_1 - C_6$  alkenyl substituted with one or more amino groups, benzyl, and benzyl substituted with  $C_1 - C_6$  alkyl. One preferred group of silanes comprises bis-(triethoxysilylpropyl) sulfides having 2 to 9 sulfur atoms, particularly bis-  
15            (triethoxysilylpropyl) tetrasulfide.

            The treatment method of the present invention is particular useful for metals chosen from the group consisting of: zinc, zinc alloys, copper, copper alloys, aluminum, and aluminum alloys. Examples of such metal surfaces are  
20            brass, bronze, and even hot-dipped galvanized steel.

            The treatment solution also preferably includes water and a solvent, such as one or more alcohols (e.g., ethanol, methanol, propanol, and iso-propanol). The total concentration of the bis-functional polysulfur silanes in the treatment  
25            solution is between about 0.1% and about 25% by volume, more preferably between about 1% and about 5%. A preferred embodiment includes between about 3 and about 20 parts methanol (as the solvent) per each part water.

            The present invention also provides a treatment solution for preventing  
30            corrosion of a metal substrate comprising at least one bis-functional polysulfur silane which has been at least partially hydrolyzed, the silane of the formula:



5


wherein each R (before hydrolysis) is an alkyl or an acetyl group, and Z is either  $-\text{S}_x$  or  $-\text{Q}-\text{S}_x-\text{Q}-$ , wherein each Q is an aliphatic or aromatic group, and x is an integer of from 2 to 9.

10 A metal surface having improved corrosion resistance is also provided, and comprises:

- (a) a metal surface; and
- (b) a silane coating bonded to the metal surface, the silane comprising at least one bis-functional polysulfur silane which has been at least

15

partially hydrolyzed, the bis-functional polysulfur silane comprising:



20

wherein each R is an alkyl or an acetyl group, and Z is either  $-\text{S}_x$  or  $-\text{Q}-\text{S}_x-\text{Q}-$ , wherein each Q is an aliphatic or aromatic group, and x is an integer of from 2 to 9.

25 US patent Nos. US 3,842,111, US 3,873,489, US 3,978,103 and US 5,405,985 all indicate that sulfur containing organosilicon compounds are useful as reactive coupling agents and adhesion promoters for, *inter alia*, rubber and metals. It is therefore envisaged that the method and treatment solution of the present invention may be utilized to promote the adhesion of rubbers or other

30 polymeric coatings, such as paints or adhesives, to metal substrates. The coated surfaces will therefore exhibit improved corrosion resistance while

affording adhesion promotion to additional coatings provided on top of the sulfur silane coated metal substrate.


## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5

Applicants have found that corrosion of metal surfaces, particularly surfaces of zinc, zinc alloys, aluminum, aluminum alloys, copper, and copper alloys, can be prevented by applying a treatment solution containing one or more bis-functional polysulfur silanes, wherein the silane(s) has been at least partially hydrolyzed. The bis-functional polysulfur silanes which may be used to prepare the treatment solution include:

10

15



20

wherein each R is an alkyl or an acetyl group, and Z is either  $-\text{S}_x$  or  $-\text{Q}-\text{S}_x-\text{Q}-$ . Each Q is an aliphatic (saturated or unsaturated) or aromatic group, and x is an integer of from 2 to 9 (preferably 4).

25


30

Each R within the sulfur-containing silane can be the same or different, and thus the silane may include both alkoxy and acetoxy moieties. As further outlined below, however, the silane(s) is hydrolyzed in the treatment solution, such that substantially all (or at least a portion) of the R groups are replaced with a hydrogen atom. In a preferred embodiment, each R may be individually chosen from the group consisting of: ethyl, methyl, propyl, iso-propyl, butyl, iso-butyl, sec-butyl, ter-butyl and acetyl. Similarly, Q within the bis-functional polysulfur silane can be the same or different. In a preferred embodiment, each Q is individually chosen from the group consisting of:  $\text{C}_1 - \text{C}_6$  alkyl (linear or branched),  $\text{C}_1 - \text{C}_6$  alkenyl (linear or branched),  $\text{C}_1 - \text{C}_6$  alkyl substituted with one



or more amino groups,  $C_1 - C_6$  alkenyl substituted with one or more amino groups, benzyl, and benzyl substituted with  $C_1 - C_6$  alkyl.

5 Particularly preferred bis-functional polysulfur silanes include bis-(triethoxysilylpropyl) sulfides having 2 to 9 sulfur atoms. Such compounds have the following formula:

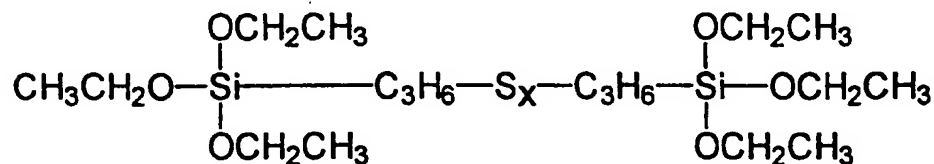

wherein x is an integer of from 2 to 9. One particularly preferred compound is bis-(triethoxysilylpropyl) tetrasulfide (also referred to as bis-(triethoxysilylpropyl) sulfane), wherein x is 4.

10

Applicants have found that the above-described bis-functional polysulfur silanes provide unexpectedly superior corrosion protection on surfaces of zinc, zinc alloys, aluminum, aluminum alloys, copper and copper alloys (particularly brass and bronze). In addition, these sulfur-containing silanes protect against multiple types of corrosion, including uniform corrosion, dezincification and stress corrosion cracking. The corrosion protection provided by the methods of the present is also superior to conventional chromate-based treatments, and avoids the chromium disposal problem.

15

20 The bis-functional polysulfur silanes employed in the present invention must be hydrolyzed so that the silane will bond to the metal surface. During hydrolysis, the alkyl or acetyl groups (i.e., the "R" moieties) are replaced with a hydrogen atom. While the silane should be at least partially hydrolyzed, the method of preparing the treatment solution of the present invention will generally result in substantially complete hydrolysis of the silane(s). As used herein, the

25

term "partially hydrolyzed" simply means that only a portion of the R groups on the silane have been replaced with a hydrogen atom. Preferably, the bis-functional polysulfur silane(s) should be hydrolyzed to the extent that at least two (and, more preferably, substantially all) of the alkyl or acetyl groups on each molecule have been replaced with a hydrogen atom.

Hydrolysis of the bis-functional polysulfur silane may be accomplished merely by adding the silane to an alcohol/water mixture, thereby forming the treatment solution of the present invention. In general, mixing the silane with the alcohol/water mixture will result in full hydrolysis of the silane (substantially all of the R groups replaced with a hydrogen atom). The water actually hydrolyzes the silane, while the alcohol is necessary to ensure adequate silane solubility and solution stability. Alcohol also improves the wettability when the treatment solution is applied to the metal surface, and reduces the time necessary for drying. Of course other suitable solvents may be employed in place of alcohol. Presently preferred alcohols are methanol and ethanol, however other alcohols may similarly be employed (such as propanol or iso-propanol). It will also be understood that more than one alcohol may be used.

In order to prepare the treatment solution of the present invention, the alcohol and water should first be mixed with one another, preferably at a ratio of between about 3 and about 99 parts alcohol(s) per 1 part water (by volume), more preferably between about 3 and about 20 parts alcohol(s) per 1 part water. After thorough mixing, the silane(s) are added to the alcohol/water mixture and mixed thoroughly to ensure adequate hydrolysis. The treatment solution should be mixed for at least 30 minutes, and up to 24 hours in order to ensure complete hydrolysis (substantially all of the R groups replaced by a hydrogen atom), thereby forming the treatment solution of the present invention.

Stability of the treatment solution of the present invention may be enhanced (e.g., sulfur precipitation inhibited) by preparing and storing the

treatment solution at a temperature less than room temperature (25 deg. C), more preferably between about 0 and about 20 deg. C. It should be noted, however, that Applicants have demonstrated good corrosion prevention results even if the treatment solution is mixed and stored at room temperature. In addition, exposure of the treatment solution to light should be limited as much as possible, since it is believed that light will reduce solution stability. The pH of the treatment solution of the present invention generally need not be modified, provided that the normal pH of the treatment solution (between about 4 and about 4.5, in the case of bis-(triethoxysilylpropyl) tetrasulfide) allows for complete hydrolysis. Of course the pH may be adjusted as needed in order to ensure complete hydrolysis, such as by the addition of acetic or formic acid.

Based upon the foregoing, it will be understood that the treatment solution of the present invention may simply comprise a solution of one or more hydrolyzed (at least partially), bis-functional polysulfur silanes (as described above), preferably in an alcohol/water solution. In fact, a preferred embodiment of the treatment solution of the present invention consists essentially of a solution of hydrolyzed bis-functional polysulfur silane(s).

The concentration of bis-functional polysulfur silanes in the treatment solution should be between about 0.1% and about 25% by volume, more preferably between about 1 and about 5%. Concentrations higher than these preferred ranges are not cost-effective, since no significant improvement in corrosion resistance will be provided, and may lead to solution instability. It should be noted that the concentration of silanes discussed and claimed herein are all measured in terms of the ratio between the volume of unhydrolyzed, bis-functional polysulfur silanes employed in the preparation of the treatment solution (i.e., prior to hydrolysis), and the total volume of treatment solution components (i.e., silanes, water, and alcohol). In addition, these concentrations refer to the total amount of unhydrolyzed bis-functional polysulfur silanes used

in preparing the treatment solution, as multiple silanes may optionally be employed in this treatment solution.

5        Once the treatment solution has been prepared in the above-described manner, the metal substrate to be treated should be solvent and/or alkaline cleaned (by techniques well-known in the prior art) prior to application of the above-described treatment solution, rinsed in deionized water and then allowed to dry. The treatment solution may then be applied directly onto the cleaned metal (i.e., with no other layers between the metal and the treatment composition  
10       of the present invention) by either dipping the metal into the solution (also referred to as "rinsing"), spraying the solution onto the surface of the metal, or even wiping or brushing the treatment solution onto the metal substrate. When the preferred application method of dipping is employed, the duration of dipping is not critical, as it will generally not affect the resulting film thickness or performance. Nevertheless, it is preferred that the dipping time be between  
15       about 1 second and about 30 minutes, more preferably between about 5 seconds and about 2 minutes in order to ensure complete coating of the metal. Unlike other silane treatment methods, the thus-coated metal may be dried at room temperature, since no heating or curing of the silane coating is necessary.  
20       Typically, drying will take a couple of minutes at room temperature, depending in part upon how much water is provided in the treatment solution (as ratio of alcohol to water is decreased, drying time is increased). While multiple coatings may be applied, a single coating will normally be sufficient.

25       The above treatment method has been shown to provide unexpectedly superior corrosion prevention, particularly on zinc, copper, aluminum, and alloys of the foregoing metals. As used herein, the term "copper alloy" refers to any alloy wherein copper is the predominant metal (i.e., no other metal is present in an amount greater than copper). Zinc alloys and aluminum alloys are similarly  
30       defined. The treatment method of the present invention is particularly effective for preventing corrosion of brass (zinc-containing copper alloys) and bronze

(copper alloys which typically include tin). Brass, for example, is highly susceptible to corrosion, particularly uniform corrosion in aqueous environments, dezincification (especially in acid-chloride containing solutions), and stress corrosion cracking (particularly in the presence of ammonia and amines).

5 Heretofore, the only effective corrosion prevention techniques for brass of which Applicants are aware is painting, or adding an additional metal to the brass during alloying (such as in admiralty brass). However, painting is not always possible or desirable, such as when the brass is used in an artistic sculpture, and the addition of other alloying elements is expensive. Applicants have found,  
10 however, that the treatment method of the present invention is very effective in preventing corrosion of brass (and bronze) without the need for an outer layer of paint. Therefore, the methods of the present invention are particularly useful and effective in preventing the corrosion of brass and bronze sculptures.

15

The examples below demonstrate some of the superior and unexpected results obtained by employing the methods and treatment solution of the present invention. In all cases, the metal substrate samples were first alkaline cleaned  
20 using a standard, non-etching alkaline cleaner (AC1055, available from Brent America, Inc.). An 8% aqueous solution of the cleaner was heated to 70 to 80 deg. C, and the metal substrates were immersed in the hot solution for a period of 2-3 minutes. The substrates were then rinsed in de-ionized water until a water-break free surface was achieved. The rinsed samples were then blown  
25 dry with compressed air.

### EXAMPLE 1

In order to compare the corrosion protection provided by the methods of  
30 the present invention with other treatment techniques, identical brass samples (alkaline cleaned, cold-rolled, 70/30 brass sheet) were coated with solutions of

1,2-bis-(triethoxysilyl) ethane ("BTSE"), vinyltrimethoxysilane, and bis-(triethoxysilylpropyl) amine, as well as a treatment solution according to the present invention.

5           The treatment solution according to the present invention was prepared as follows. 25 ml of water was thoroughly mixed with 450 ml of methanol (18 parts methanol for each part water, by volume). Next, 25 ml of bis-(triethoxysilylpropyl) tetrasulfide was slowly added to the methanol/water mixture, while mixing, thereby providing a silane concentration of about 5%, by  
10           volume. The treatment solution was mixed for at least an hour in order to ensure sufficient hydrolysis of the silane. In order to prevent sulfur precipitation, the solution was then refrigerated such that the temperature was reduced to about 5 deg. C. Refrigeration also excluded light from the treatment solution. This treatment solution was then applied to a sample of cold-rolled, 70/30 brass sheet  
15           by dipping. The solution temperature was about 5 to 10 deg. C, and the sample was dipped for about 100 seconds. After coating, the sample was dried in air at room temperature.

          Comparative treatment solutions of 1,2-bis-(triethoxysilyl) ethane  
20           ("BTSE"), vinyltrimethoxysilane, bis-(triethoxysilylpropyl) amine were prepared in a similar fashion. In all cases, the silane concentration was about 5%, and an alcohol/water solvent mix was used. In addition, the pH of each of each solution was adjusted, as needed, in order to ensure maximum hydrolysis. The pH of the BTSE and vinyltrimethoxysilane solutions was about 4 to about 6, while the pH  
25           of the bis-(triethoxysilylpropyl) amine solution was about 10 to about 11. Any needed adjustments to pH were accomplished using acetic acid and sodium hydroxide. Samples of alkaline-cleaned, cold-rolled, 70/30 brass sheet were coated with these solutions in the same manner described above.

30           In order to simulate the corrosive environment of seawater, the coated samples, and an uncoated control, were partially immersed in a 3% NaCl

solution for 1000 hours. The samples were then removed and visually examined for any visible signs of corrosion, including attack at the water line and any discoloration. The results are provided in the table below.

5	<b>Sample</b>	<b>After 1000 hours in 3% NaCl solution</b>
	uncoated (only alkaline cleaned)	heavy discoloration, waterline attack with copper deposits present
	BTSE	heavy discoloration, waterline attack with heavy copper deposits present
	Vinyl Silane	slight discoloration, minimum deposit of copper at waterline
10	bis-(triethoxysilylpropyl) amine	blue copper deposits throughout the immersed region, heavy waterline attack
	bis-(triethoxysilylpropyl) tetrasulfide	no change from original appearance

15

**EXAMPLE 2**

Brass samples were prepared in accordance with the methods described in Example 1 above. The coated samples and uncoated control were then immersed in a 0.2N HCl solution for 5 days in order to examine the ability of the treatment solutions of the present invention to prevent dezincification. The following results were observed:

20

25

5

Sample	After 5 days in 0.2 N HCl solution
uncoated (only alkaline cleaned)	dezincification observed throughout the immersed region
BTSE	heavy dezincification observed throughout the immersed region
Vinyl Silane	dezincification observed throughout the immersed region
bis-(triethoxysilylpropyl) tetrasulfide	no change from original appearance (i.e., no dezincification)

10

### EXAMPLE 3

15

20

25

Three brass samples were alkaline cleaned, and a treatment solution according to the present invention was prepared in accordance with the methods of Example 1. One of the brass samples was uncoated, and therefore acted as a control. The uncoated sample was bent over itself (180 degrees) in order to provide a high stress region on the sample for simulating stress corrosion cracking. The second sample was coated with the treatment solution of the present invention in the manner described in Example 1, and was then bent over itself. The third sample was first bent over itself, and was then coated with the treatment solution of the present invention in the manner described in Example 1. All three samples were then exposed to strong ammonia vapors for a period of 18 hours. After exposure, the samples were visually examined for corrosion, and thereafter opened (i.e., "unbent"). The results provided in the table below once again demonstrate the ability of the treatment method of the present invention to prevent corrosion, and also show that the coating thus provided is deformable:



Sample	After 18-hour exposure to ammonia vapors	Effect of opening bend
uncoated control	heavy darkening of the entire surface	sample broke at the bend
coated, then bent	minimal darkening at edges	initiation of crack at one end of bend
bent, then coated	minimal darkening at edges	no crack initiated

5

#### EXAMPLE 4

10 Three samples of Al 2024 were alkaline cleaned in the manner described previously. One sample acted as the control, and was not coated in any manner after alkaline cleaning. The second panel was subjected to a standard chromate treatment, in a manner well-known to those skilled in the art. The third panel was coated with the bis-(triethoxysilylpropyl) tetrasulfide solution described in Example 1, in the manner described therein.

15

In order to examine the formability of the coating as well as any negative effect of forming on corrosion performance, all three samples were deep drawn to a depth of about 8mm in a cup drawing machine in order to make standard cups for use in Olsen testing. Since the drawing process necessitated the application of a lubricant to the inner surface of the cup, some solvent cleaning was performed (using methanol and hexane) after drawing in order to remove any oil contamination. The drawn samples were then completely immersed in a 3% NaCl solution for a period of one week, and the samples were then visually observed for signs of corrosion (both the inner and outer surfaces):

25

Sample	After 1 week exposure to 3% NaCl solution
control (alkaline cleaned only)	discoloration of the entire surface, heavier at the drawn region; pitting with white deposits at many points on the sample; edge corrosion
chromated	slight discoloration of the sample, heavier at the drawn region; pitting heavy with white deposits throughout the sample
bis-(triethoxysilylpropyl) tetrasulfide	original appearance throughout the sample, including the drawn region; no pitting; no edge corrosion

5

The above results demonstrate that the sulfur-containing silanes used in the methods and treatment solution of the present invention are also effective on aluminum and aluminum alloys.

10

#### EXAMPLE 5

In order to examine the effectiveness of the methods of the present invention in preventing corrosion of surfaces of zinc and zinc alloys (including, for example, hot-dipped galvanized steel), standard titanium zinc panels (primarily zinc, with less than 1% titanium; available from Nedzinc) were alkaline-cleaned in the manner described previously. One panel was uncoated, while another was coated with the treatment solution of Example 1, in the manner described therein. These panels were then subjected to the Butler Horizontal Water Immersion Test (developed by the Butler Manufacturing Company of Grandview, Missouri). The uncoated panel exhibited white rust over 80% of its surface after only one day, while the panel treated according to the present invention showed only 5% white rust after 6 weeks of exposure.

15

20


5 The foregoing description of preferred embodiments is by no means exhaustive of the variations in the present invention that are possible, and has been presented only for purposes of illustration and description. Obvious modifications and variations will be apparent to those skilled in the art in light of the teachings of the foregoing description without departing from the scope of this invention. Thus, it is intended that the scope of the present invention be defined by the claims appended hereto.

**What we claim is:**

1. A method of treating a metal surface to improve corrosion resistance, comprising the steps of:

- (a) providing a metal surface; and
- (b) applying a treatment solution onto said metal surface, said treatment solution containing at least one bis-functional polysulfur silane which has been at least partially hydrolyzed, said silane comprising:

5



wherein each R is an alkyl or an acetyl group, and Z is either  $-\text{S}_x-$  or  $-\text{Q}-\text{S}_x-\text{Q}-$ , wherein each Q is an aliphatic or aromatic group, and x is an integer of from 2 to 9.

10

2. The method of claim 1, wherein each R is individually chosen from the group consisting of: ethyl, methyl, propyl, iso-propyl, butyl, iso-butyl, sec-butyl, ter-butyl and acetyl.

3. The method of claim 1 or claim 2, wherein each Q is individually chosen from the group consisting of:  $\text{C}_1 - \text{C}_6$  alkyl (linear or branched),  $\text{C}_1 - \text{C}_6$  alkenyl (linear or branched),  $\text{C}_1 - \text{C}_6$  alkyl substituted with one or more amino groups,  $\text{C}_1 - \text{C}_6$  alkenyl substituted with one or more amino groups, benzyl, and benzyl substituted with  $\text{C}_1 - \text{C}_6$  alkyl.

5

4. The method of any of claims 1 to 3, wherein said bis-functional polysulfur silane comprises a bis-(triethoxysilylpropyl) sulfide having 2 to 9 sulfur atoms, preferably 4 sulfur atoms.

5. The method of any preceding claim, wherein said bis-functional polysulfur silane comprises bis-(triethoxysilylpropyl) tetrasulfide.
6. The method of any preceding claim, wherein said metal is chosen from the group consisting of: zinc, zinc alloys, copper, copper alloys, aluminum, and aluminum alloys.
7. The method of any preceding claim, wherein said metal comprises brass or bronze.
8. The method of any preceding claim, wherein said treatment solution further comprises water and a solvent.
9. The method of claim 8, wherein said solvent comprises an alcohol chosen from the group consisting of ethanol, methanol, propanol, and isopropanol.
10. The method of any claim, wherein the total concentration of said bis-functional polysulfur silanes in said treatment solution is between about 0.1% and about 25% by volume.
11. The method of claim 10, wherein the total concentration of said bis-functional polysulfur silanes in said treatment solution is between about 1% and about 5% by volume.
12. The method of any of claims 9 to 11, wherein said alcohol is methanol, and said treatment solution has between about 3 and about 20 parts methanol per each part water.
13. Use of a treatment solution for preventing corrosion of a metal substrate comprising at least one bis-functional polysulfur silane as defined in

any of claims 1 to 5 in a method of improving corrosion resistance, comprising the steps of:

- (a) providing a metal surface; and
- (b) applying a treatment solution onto said metal surface

5

14. The use of claim 13 wherein each R (before hydrolysis) is individually chosen from the group consisting of: ethyl, methyl, propyl, iso-propyl, butyl, iso-butyl, sec-butyl, ter-butyl and acetyl.

# INTERNATIONAL SEARCH REPORT

Inter-Office Communication No.  
PC./EP/99/04371

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C23F11/16 C23C22/02 C23C22/52 C23C22/53 C23C22/56  
C23C22/68

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C23F C23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 978 103 A (MEYER-SIMON EUGEN ET AL) 31 August 1976 (1976-08-31) cited in the application column 1, line 19,20; claims 5,7,9,10 ---	1-5,13, 14
A	PATENT ABSTRACTS OF JAPAN vol. 009, no. 218 (C-301), 5 September 1985 (1985-09-05) -& JP 60 081256 A (SHINETSU KAGAKU KOGYO KK), 9 May 1985 (1985-05-09) abstract ---	1,13
A	US 5 750 197 A (SUBRAMANIAN VIJAY ET AL) 12 May 1998 (1998-05-12) claim 1 --- -/--	1,13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 October 1999

Date of mailing of the international search report

29/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Torfs, F

# INTERNATIONAL SEARCH REPORT

International Application No.

PC/EP 89/04371

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 86 06072 A (SCM CORP) 23 October 1986 (1986-10-23) claim 1 ---	1, 13
A	US 5 393 353 A (BISHOP CRAIG V) 28 February 1995 (1995-02-28) ---	
A	GB 1 018 311 A (TH. GOLDSCHMIDT AG) 26 January 1966 (1966-01-26) -----	



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC./EP 99/04371

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3978103 A	31-08-1976	DE 2141159 A DE 2141160 A DE 2212239 A AT 315874 B BE 787691 A BR 7205584 A CS 188151 B DD 99585 A ES 403883 A FR 2149339 A GB 1394135 A IT 962125 B JP 48029726 A JP 51028623 B NL 7209035 A,B US 3842111 A US 3873489 A US 3997356 A US 4076550 A AT 319970 B AT 320675 B NL 7209034 A,B AR 197107 A CA 1018991 A	01-03-1973 01-03-1973 04-10-1973 15-05-1974 19-02-1973 04-05-1976 28-02-1979 12-08-1973 01-05-1975 30-03-1973 14-05-1975 20-12-1973 19-04-1973 20-08-1976 20-02-1973 15-10-1974 25-03-1975 14-12-1976 28-02-1978 27-01-1975 25-02-1975 20-02-1973 15-03-1974 11-10-1977
JP 60081256 A	09-05-1985	NONE	
US 5750197 A	12-05-1998	AU 5862498 A WO 9830735 A	03-08-1998 16-07-1998
WO 8606072 A	23-10-1986	US 4618688 A EP 0220232 A JP 62502468 T	21-10-1986 06-05-1987 24-09-1987
US 5393353 A	28-02-1995	NONE	
GB 1018311 A		US 3392182 A	09-07-1968